





# CM360SH

Technical Datasheet  
for Bonded Injection Type Anchor

**Threaded rod**

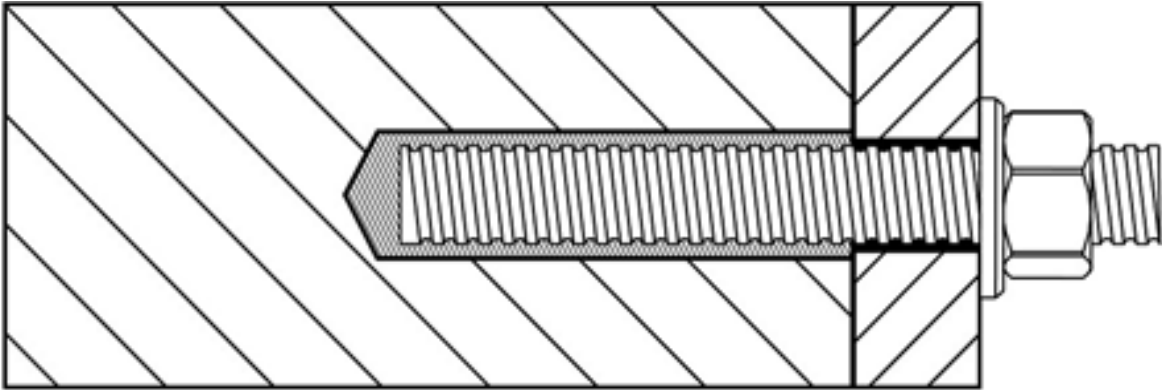

**Reinforcing bar**

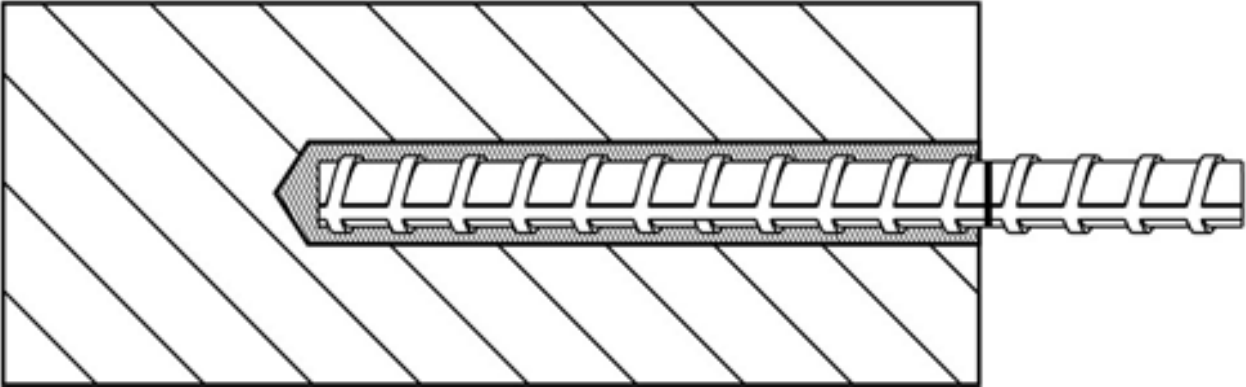

**Coaxial cartridge**

ICFS CM SH, Fading blue, Tropical, Tropical Fading blue

410 ml  
420 ml



**Side by side cartridge**

ICFS CM SH, Fading blue, Tropical, Tropical Fading blue

360 ml



**Two part foil in a single piston component cartridge**

ICFS CM SH, Fading blue, Tropical, Tropical Fading blue

300 ml



**Marking of the mortar cartridges**


Identifying mark of the producer, Trade name, Charge code number, Storage life, Curing and processing time

**Mixing nozzle**

**MN 300**




**CMWN**




**EZ-Flow**



**MN 400**



**Threaded rod M8, M10, M12, M16, M20, M24, M27, M30**

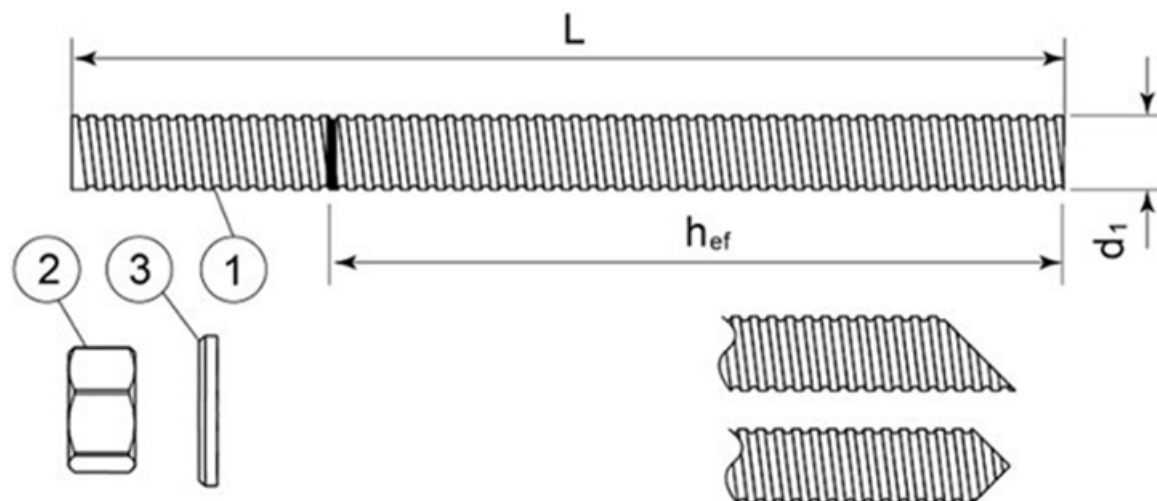

Standard commercial threaded rod with marked embedment depth

| Part  | Designation  | Material   |
|---|--|--|
| <b>Steel, zinc plated <math>\geq 5 \mu\text{m}</math> acc. to EN ISO 4042 or<br/>                     Steel, Hot-dip galvanized <math>\geq 40 \mu\text{m}</math> acc. to EN ISO 1461 and EN ISO 10684 or<br/>                     Steel, zinc diffusion coating <math>\geq 15 \mu\text{m}</math> acc. to EN 13811</b> |  |  |
| 1   | Anchor rod   | Steel, EN 10087 or EN 10263CAS 4.6, CAS 5.8, CAS 8.8, CAS 10.9* EN ISO 898 1 |
| 2   | Hexagon nut EN ISO 4032  | According to threaded rod, EN 20898-2  |
| 3   | Washer<br>EN ISO 887, EN ISO 7089,<br>EN ISO 7093 or EN ISO 7094 | According to threaded rod  |
| <b>Stainless steel</b>  |  |  |
| 1   | Anchor rod   | CAS A2-70, CAS A4-70,<br>CAS A4-80 EN ISO 3506                               |
| 2   | Hexagon nut EN ISO 4032  | According to threaded rod  |
| 3   | Washer<br>EN ISO 887, EN ISO 7089,<br>EN ISO 7093 or EN ISO 7094 | According to threaded rod  |
| <b>High corrosion resistant steel</b>   |  |  |
| 1   | Anchor rod   | CAS HCR, CAS UHCR EN 10088-1   |
| 2   | Hexagon nut EN ISO 4032  | According to threaded rod  |
| 3   | Washer<br>EN ISO 887, EN ISO 7089,<br>EN ISO 7093 or EN ISO 7094 | According to threaded rod  |

\*Galvanized rod of high strength are sensitive to hydrogen induced brittle failure

**Rebar Ø8, Ø10, Ø12, Ø16, Ø20, Ø25, Ø32**



Standard commercial reinforcing bar with marked embedment depth

| Product Form   |                       | Bars and de-coiled rods |                       |
|--|-----------------------|-------------------------|-----------------------|
| Class  |                       | B                       | C                     |
| Characteristic yield strength $f_{yk}$ or $f_{0,2k}$ (MPa) |                       | 400 to 600              |                       |
| Minimum value of $k = (f_t / f_y)_k$                       |                       | $\geq 1,08$             | $\geq 1,15$<br>< 1,35 |
| Characteristic strain at maximum force $\epsilon_{uk}$ (%) |                       | $\geq 5,0$              | $\geq 7,5$            |
| Bendability  |                       | Bend / Rebind test      |                       |
| Maximum deviation from nominal mass (individual bar) (%)   | Nominal bar size (mm) | $\pm 6,0$<br>$\pm 4,5$  |                       |
|  | $\leq 8$<br>$> 8$     |                         |                       |
| Bond:<br>Minimum relative rib area, $f_{R,min}$            | Nominal bar size (mm) | 0,040<br>0,056          |                       |
|  | 8 to 12<br>$> 12$     |                         |                       |

**Specifications of intended use**

**Anchorage subject to:**

- Static and quasi-static load.
- Seismic actions category C1 (max w = 0,5 mm): threaded rod size M10, M12, M16, M20, M24
- Seismic actions category C2 (max w = 0,8 mm): threaded rod size M12, M16, M20

**Base materials**

- Uncracked concrete.
- Cracked and uncracked concrete for threaded rod size M10, M12, M16, M20, M24
- Reinforced or unreinforced normal weight concrete of strength class C20/25 at minimum and C50/60 at maximum according EN 206:2013

**Temperature range:**

- -40°C to +80°C (max. short. term temperature +80°C and max. long term temperature +50°C)

**Use conditions (Environmental conditions)**

- (X1) Structures subject to dry internal conditions (zinc coated steel, stainless steel, high corrosion resistance steel).
- (X2) Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel A4, high corrosion resistant steel).
- (X3) Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

**Note:**

Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

## Concrete conditions:

- I1 – installation in dry or wet (water saturated) concrete and use in service in dry or wet concrete.
- I2 – installation in water-filled (not sea water) and use in service in dry or wet concrete

## Design:

- The anchorages are designed in accordance with the EN 1992-4 under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.
- Anchorages under seismic actions (cracked concrete) have to be designed in accordance with EN 1992-4.

## Installation

- Hole drilling by hammer drilling, dustless drilling or diamond core drilling mode.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

## Installation direction:

- D3 – downward and horizontal and upwards (e.g. overhead) installation

## HDB – Hollow Drill Bit System

### Heller Duster Expert hollow drill bit


- SDS-Plus  $\leq 16\text{mm}$
- SDS-Max  $\geq 16\text{mm}$

### Class M vacuum

- Minimum flow rate  $266\text{ m}^3/\text{h}$  ( $74\text{ l/s}$ )



## Cleaning brush

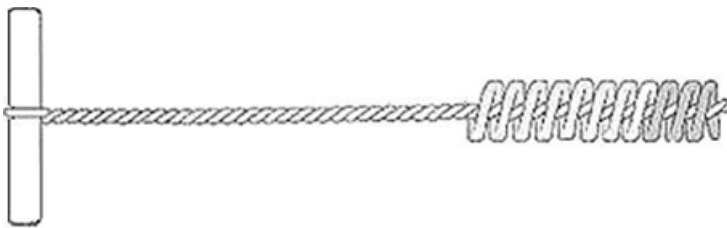

**Applicator gun**



| Applicator gun | Cartridge    |             |
|----------------|--------------|-------------|
| A              | Coaxial      | 410ml 420ml |
| B              | Side by side | 360ml       |
| C              | Foil capsule | 300ml       |
| D              | Foil capsule | 300ml       |

## SOLID SUBSTRATE INSTALLATION METHOD

1. Using the SDS hammer drill (HD) in rotary hammer mode for drilling, with a carbide tipped drill bit of the appropriate size, drill the hole to the specified hole diameter and depth.

2. Select the correct air lance, insert to the bottom of the hole, and depress the trigger for 2 seconds. The compressed air must be clean and free from water and oil, with a minimum pressure of 90 psi (6 bar). A manual pump may be used for certain diameters and depths; check the approval document. Perform the blowing operation twice.

3. Select the correct size hole cleaning brush. Ensure that the brush is in good condition and of the correct diameter. Insert the brush to the bottom of the hole, using a brush extension if needed to reach the bottom. Withdraw with a twisting motion. There should be a positive interaction between the bristles of the brush and the sides of the drilled hole. Perform the brushing operation twice.

4. Repeat step 2 (blowing operation x2)

5. Repeat step 3 (brushing operation x2)

6. Repeat step 2 (blowing operation x2)

7. Select the most appropriate static mixer nozzle, checking that the mixing elements are present and fit for purpose. Never modify the mixer. Attach the mixer nozzle to the cartridge. Check the dispensing tool is in good working order. Place the cartridge into the dispensing tool.

8. Extrude some resin to waste until an even coloured mixture is achieved. The cartridge is now ready for use.

9. Insert the mixing nozzle to the bottom of the hole. Extrude the resin and slowly withdraw the nozzle from the hole. Ensure no air voids are created as the nozzle is withdrawn. Inject resin until the hole is approximately 3/4 full and remove the nozzle from the hole.

10. Select the steel anchor element ensuring it is free from oil or other contaminants, and mark with the required embedment depth. Insert the steel element into the hole using a back and forth twisting motion to ensure complete cover, until it reaches the bottom of the hole. Excess resin will be expelled from the hole evenly around the steel element and there shall be no gaps between the anchor element and the wall of the drilled hole.

11. Clean any excess resin from around the mouth of the hole.

12. Refer to the working and loading times within the tables to determine the appropriate cure time.

13. Position the fixture and tighten the anchor to the appropriate installation torque. Do not over-torque the anchor, as this could adversely affect its performance.





## DEEP EMBEDMENT & OVERHEAD INSTALLATION METHOD



**1a.** Perform steps 1-8 under "solid substrate installation method".

**2a.** Attach the correct diameter and length extension tube to the nozzle. Select the correct diameter resin stopper for the application, then push and screw the extension tube into the resin stopper. This is held in place with a coarse internal thread. The resin stopper is a reusable accessory.

**3a.** Push the resin stopper and extension tube to the back of the drill hole.

**4a.** Ensure the extension tube is angled to allow free movement of the resin stopper as the resin is extruded.

**5a.** Continue from step 10 under "solid substrate installation method".



## DIAMOND CORE DRILLING

**1b.** Using a diamond core drill (DD) and following the manufacturer's instructions, drill the specified diameter hole to the correct embedment depth then remove the concrete core.

**2b.** Starting from the back of the hole, flush with pressurised water a minimum of two times and until there is only clean water.


**3b.** Select the correct size hole cleaning brush. Ensure that the brush is in good condition and of the correct diameter. Insert the brush to the bottom of the hole, using a brush extension if needed to reach the bottom. Withdraw with a twisting motion. There should be a positive interaction between the bristles of the brush and the sides of the drilled hole. Perform the brushing operation twice.

**4b.** Repeat step 2b (flushing operation x2).

**5b.** Repeat step 3b (brushing operation x2).

**6a.** Using the correct air lance and starting from the back of the hole and withdrawing, perform a minimum of two blowing operations and ensure that the hole is clear of debris and excess water.

**7a.** Continue from step 7 under "solid substrate installation method"




## DUSTLESS DRILLING

**1c.** Using the specified hollow drill bit (HDB) and vacuum system and following the manufacturer's instructions, drill the specified diameter hole to the correct embedment depth. Ensure that the minimum vacuum specifications are met and that the vacuum is turned on.

**2c.** The hole should be inspected to ensure the system has worked correctly. If the hole is clear of dust and debris, no further cleaning is required.

**3c.** Continue from step 7 under "solid substrate installation method".



**Table B1:**
**Installation parameters of threaded rod**

| Sizes                                 |                   |      | M8                             | M10 | M12 | M16 | M20             | M24 | M27 | M30 |
|---------------------------------------|-------------------|------|--------------------------------|-----|-----|-----|-----------------|-----|-----|-----|
| Nominal drill hole diameter           | $\varnothing d_0$ | [mm] | 10                             | 12  | 14  | 18  | 22              | 26  | 30  | 35  |
| Diameter of cleaning brush            | $d_b$             | [mm] | 14                             | 14  | 20  | 20  | 29              | 29  | 40  | 40  |
| Manual pump cleaning                  |                   |      | $h_{ef} < 300$ mm              |     |     |     |                 |     | /   |     |
| Torque moment                         | $\max T_{fix}$    | [Nm] | 10                             | 20  | 40  | 80  | 150             | 200 | 240 | 275 |
| Depth of drill hole for $h_{ef,min}$  | $h_0 = h_{ef}$    | [mm] | 64                             | 80  | 96  | 128 | 160             | 192 | 216 | 240 |
| Depth of drill hole for $h_{ef,max}$  | $h_0 = h_{ef}$    | [mm] | 160                            | 200 | 240 | 320 | 400             | 480 | 540 | 600 |
| Minimum edge distance                 | $c_{min}$         | [mm] | 35                             | 40  | 50  | 65  | 80              | 96  | 110 | 120 |
| Minimum spacing                       | $s_{min}$         | [mm] | 35                             | 40  | 50  | 65  | 80              | 96  | 110 | 120 |
| Minimum thickness of member $h_{min}$ |                   |      | $h_{ef} + 30$ mm $\geq$ 100 mm |     |     |     | $h_{ef} + 2d_0$ |     |     |     |

**Table B2:**
**Installation parameters of rebar**

| Sizes                                 |                   |      | Ø8                             | Ø10 | Ø12 | Ø16 | Ø20             | Ø25 | Ø32 |  |
|---------------------------------------|-------------------|------|--------------------------------|-----|-----|-----|-----------------|-----|-----|--|
| Nominal drill hole diameter           | $\varnothing d_0$ | [mm] | 12                             | 14  | 16  | 20  | 25              | 32  | 40  |  |
| Diameter of cleaning brush            | $d_b$             | [mm] | 14                             | 14  | 19  | 22  | 29              | 40  | 42  |  |
| Manual pump cleaning                  |                   |      | $h_{ef} < 300$ mm              |     |     |     |                 |     | /   |  |
| Depth of drill hole for $h_{ef,min}$  | $h_0 = h_{ef}$    | [mm] | 64                             | 80  | 96  | 128 | 160             | 200 | 256 |  |
| Depth of drill hole for $h_{ef,max}$  | $h_0 = h_{ef}$    | [mm] | 160                            | 200 | 240 | 320 | 400             | 500 | 640 |  |
| Minimum edge distance                 | $c_{min}$         | [mm] | 35                             | 40  | 50  | 65  | 80              | 100 | 130 |  |
| Minimum spacing                       | $s_{min}$         | [mm] | 35                             | 40  | 50  | 65  | 80              | 100 | 130 |  |
| Minimum thickness of member $h_{min}$ |                   |      | $h_{ef} + 30$ mm $\geq$ 100 mm |     |     |     | $h_{ef} + 2d_0$ |     |     |  |

**Table B3**

**Minimum curing time ICFS CM SH, ICFS CM SH Fading blue**

| Resin cartridge temperature [°C] | T Work [mins] | Base material Temperature [°C] | T Load [mins] |
|----------------------------------|---------------|--------------------------------|---------------|
| +10                              | 30 mins       | -10 to -5                      | 24 hours      |
| +5                               | 20 mins       | -5 to 0                        | 300 mins      |
| 0 to +5                          | 15 mins       | 0 to +5                        | 210 mins      |
| +5 to +10                        | 10 mins       | +5 to +10                      | 145 mins      |
| +10 to +15                       | 8 mins        | +10 to +15                     | 85 mins       |
| +15 to +20                       | 6 mins        | +15 to +20                     | 75 mins       |
| +20 to +25                       | 5 mins        | +20 to +25                     | 50 mins       |
| +25 to +30                       | 4 mins        | +25 to +30                     | 40 mins       |

**ICFS CM SH Tropical, ICFS CM SH Tropical Fading blue**

| Resin cartridge temperature [°C] | T Work [mins] | Base material Temperature [°C] | T Load [mins] |
|----------------------------------|---------------|--------------------------------|---------------|
| +15 to +20                       | 15 mins       | +15 to +20                     | 5 hours       |
| +15 to +25                       | 10 mins       | +20 to +25                     | 145 mins      |
| +15 to +30                       | 7.5 mins      | +25 to +30                     | 85 mins       |
| +15 to +35                       | 5 mins        | +30 to +35                     | 50 mins       |
| +15 to +40                       | 3.5 mins      | +35 to +40                     | 40 mins       |

T work is typical gel time at highest temperature

T load is set at the lowest temperature

**Table C1:**

**Design method EN 1992-4**

**Steel failure - Characteristic values of resistance to tension load of threaded rod**

| Steel failure Characteristic resistance |               |      |      |     |     |     |     |     |     |     |
|---|---------------|------|------|-----|-----|-----|-----|-----|-----|-----|
| Sizes                                   |               |      | M8   | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
| CAS 4.6                                 | $N_{Rk,s}$    | [kN] | 15   | 23  | 34  | 63  | 98  | 141 | 184 | 224 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 2,00 |     |     |     |     |     |     |     |
| CAS 5.8                                 | $N_{Rk,s}$    | [kN] | 18   | 29  | 42  | 79  | 123 | 177 | 230 | 281 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,50 |     |     |     |     |     |     |     |
| CAS 8.8                                 | $N_{Rk,s}$    | [kN] | 29   | 46  | 67  | 126 | 196 | 282 | 367 | 449 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,50 |     |     |     |     |     |     |     |
| CAS 10.9                                | $N_{Rk,s}$    | [kN] | 37   | 58  | 84  | 157 | 245 | 353 | 459 | 561 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,33 |     |     |     |     |     |     |     |
| CAS A2-70, CAS A4-70                    | $N_{Rk,s}$    | [kN] | 26   | 41  | 59  | 110 | 172 | 247 | 321 | 393 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,87 |     |     |     |     |     |     |     |
| CAS A4-80                               | $N_{Rk,s}$    | [kN] | 29   | 46  | 67  | 126 | 196 | 282 | 367 | 449 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,60 |     |     |     |     |     |     |     |
| CAS HCR                                 | $N_{Rk,s}$    | [kN] | 26   | 41  | 59  | 110 | 172 | 247 | 321 | 393 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,50 |     |     |     |     |     |     |     |
| CAS UHCR                                | $N_{Rk,s}$    | [kN] | 26   | 41  | 59  | 110 | 172 | 247 | 321 | 393 |
| Partial safety factor                   | $\gamma_{Ms}$ | [-]  | 1,87 |     |     |     |     |     |     |     |

**Table C2:**

**Design method EN 1992-4**

**Steel failure - Characteristic values of resistance to tension load of rebar**

| Steel failure – Characteristic resistance |               |      |     |     |     |     |     |     |     |  |
|---|---------------|------|-----|-----|-----|-----|-----|-----|-----|--|
| Sizes                                     |               |      | Ø8  | Ø10 | Ø12 | Ø16 | Ø20 | Ø25 | Ø32 |  |
| Rebar BSt 500 S                           | $N_{Rk,s}$    | [kN] | 28  | 43  | 62  | 111 | 173 | 270 | 442 |  |
| Partial safety factor                     | $\gamma_{Ms}$ | [-]  | 1,4 |     |     |     |     |     |     |  |

**Table C3:**

Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

| <b>Combined pullout and concrete cone failure in concrete C20/25</b>                                     |                 |                      |            |            |            |            |            |            |            |            |
|--|-----------------|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>Hammer Drilling</b>   |                 |                      |            |            |            |            |            |            |            |            |
| <b>Sizes</b>   |                 |                      | <b>M8</b>  | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> | <b>M27</b> | <b>M30</b> |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b> |                 |                      |            |            |            |            |            |            |            |            |
| <b>Dry and wet concrete</b>  | $\tau_{RK,ucr}$ | [N/mm <sup>2</sup> ] | 11,0       | 10,0       | 9,5        | 9,0        | 8,5        | 8,0        | 6,5        | 5,5        |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,2        |            |            |            |            |            | 1,4        |            |
| <b>Flooded hole</b>  | $\tau_{RK,ucr}$ | [N/mm <sup>2</sup> ] | 9,0        | 8,0        | 7,5        | 7,0        | 7,0        | 6,0        |            |            |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,4        |            |            |            |            |            |            |            |
| <b>Sizes</b>   |                 |                      | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> |            |            |            |
| <b>Characteristic bond resistance in cracked concrete for a working life of 50 years</b>                 |                 |                      |            |            |            |            |            |            |            |            |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 5,5        | 5,5        | 5,5        | 5,0        | 5,0        |            |            |            |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,2        |            |            |            |            |            |            |            |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 5,5        | 5,5        | 5,5        | 5,0        | 5,0        |            |            |            |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,4        |            |            |            |            |            |            |            |
| <b>Sizes</b>   |                 |                      | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> |            |            |            |
| <b>Characteristic bond resistance in cracked concrete for a working life of 100 years</b>                |                 |                      |            |            |            |            |            |            |            |            |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 4,0        | 4,0        | 4,0        | 3,5        | 3,5        |            |            |            |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,2        |            |            |            |            |            |            |            |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 4,0        | 4,0        | 4,0        | 3,5        | 3,5        |            |            |            |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,4        |            |            |            |            |            |            |            |
| <b>Dustless drilling</b>   |                 |                      |            |            |            |            |            |            |            |            |
| <b>Sizes</b>   |                 |                      | <b>M8</b>  | <b>M10</b> | <b>M12</b> | <b>M16</b> | <b>M20</b> | <b>M24</b> | <b>M27</b> | <b>M30</b> |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b> |                 |                      |            |            |            |            |            |            |            |            |
| <b>Dry and wet concrete</b>  | $\tau_{RK,ucr}$ | [N/mm <sup>2</sup> ] | 11,0       | 10,0       | 9,5        | 9,0        | 8,5        | 8,0        | 6,5        | 5,5        |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,2        |            |            |            |            |            |            |            |
| <b>Flooded hole</b>  | $\tau_{RK,ucr}$ | [N/mm <sup>2</sup> ] | 11,0       | 9,0        | 8,5        | 8,5        | 8,5        | 6,5        | 5,5        | 5,0        |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,4        |            |            |            |            |            |            |            |

# Technical Datasheet - Indo Construction Fastening Systems

| Sizes  |                 |                      | M10 | M12 | M16 | M20 | M24 |
|--|-----------------|----------------------|-----|-----|-----|-----|-----|
| <b>Characteristic bond resistance in cracked concrete for a working life of 50 years</b> |                 |                      |     |     |     |     |     |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 5,5 | 5,5 | 5,5 | 5,0 | 5,0 |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,2 |     |     |     |     |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 5,5 | 5,5 | 5,5 | 5,0 | 5,0 |
| Installation safety factor   | $\gamma_{inst}$ | [-]                  | 1,4 |     |     |     |     |

| Sizes   |                 |                      | M10 | M12 | M16 | M20 | M24 |
|---|-----------------|----------------------|-----|-----|-----|-----|-----|
| <b>Characteristic bond resistance in cracked concrete for a working life of 100 years</b> |                 |                      |     |     |     |     |     |
| <b>Dry and wet concrete</b>   | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 4,0 | 4,0 | 4,0 | 3,5 | 3,5 |
| Installation safety factor  | $\gamma_{inst}$ | [-]                  | 1,2 |     |     |     |     |
| <b>Flooded hole</b>   | $\tau_{RK,cr}$  | [N/mm <sup>2</sup> ] | 4,0 | 4,0 | 4,0 | 3,5 | 3,5 |
| Installation safety factor  | $\gamma_{inst}$ | [-]                  | 1,4 |     |     |     |     |

|   |        |                  |     |      |  |  |  |
|---|--------|------------------|-----|------|--|--|--|
| Factor for uncracked concrete   | C50/60 | $\psi_c$         | [-] | 1    |  |  |  |
| Factor for cracked concrete   | C30/37 | $\psi_c$         | [-] | 1,12 |  |  |  |
|   | C40/50 |                  |     | 1,23 |  |  |  |
|   | C50/60 |                  |     | 1,30 |  |  |  |
| Factor for influence of sustained<br>T1: 24°C / 40°C<br>load for a working life 50 years<br>T2: 50°C / 80°C |        | $\psi^{0_{sus}}$ | [-] | 0,75 |  |  |  |
|   |        |                  |     | 0,73 |  |  |  |

| <b>Concrete cone failure</b>                            |             |      |                    |
|---|-------------|------|--------------------|
| Factor for concrete cone failure for uncracked concrete | $k_{ucr,N}$ | [-]  | 11                 |
| Factor for concrete cone failure for cracked concrete   | $k_{cr,N}$  | [-]  | 7,7                |
| Edge distance   | $c_{cr,N}$  | [mm] | 1,5h <sub>ef</sub> |

| <b>Splitting failure</b> |             |      |                    |     |     |     |     |     |     |     |
|--------------------------|-------------|------|--------------------|-----|-----|-----|-----|-----|-----|-----|
| Sizes                    |             |      | M8                 | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
| Edge distance            | $c_{cr,sp}$ | [mm] | 1,5h <sub>ef</sub> |     |     |     |     |     |     |     |
| Spacing                  | $s_{cr,sp}$ | [mm] | 3,0h <sub>ef</sub> |     |     |     |     |     |     |     |

**Table C4:**

Design method EN 1992-4

Characteristic values of resistance to tension load of rebar

| Combined pullout and concrete cone failure in uncracked concrete C20/25                                     |                  |                      |                  |                    |                    |     |     |     |     |
|---|------------------|----------------------|------------------|--------------------|--------------------|-----|-----|-----|-----|
| Hammer Drilling   |                  |                      |                  |                    |                    |     |     |     |     |
| Sizes   |                  |                      | Ø8               | Ø10                | Ø12                | Ø16 | Ø20 | Ø25 | Ø32 |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b>    |                  |                      |                  |                    |                    |     |     |     |     |
| <b>Dry and wet concrete</b>   | $\tau_{RK,ucr}$  | [N/mm <sup>2</sup> ] | 12,0             | 10,0               | 10,0               | 9,0 | 9,0 | 9,0 | 5,5 |
| Installation safety factor  | $\gamma_{inst}$  | [-]                  | 1,2              |                    |                    |     |     |     |     |
| <b>Flooded hole</b>   | $\tau_{RK,ucr}$  | [N/mm <sup>2</sup> ] | 12,0             | 10,0               | 10,0               | 9,0 | 9,0 | 9,0 | 5,5 |
| Installation safety factor  | $\gamma_{inst}$  | [-]                  | 1,4              |                    |                    |     |     |     |     |
| Factor for influence of sustained<br>T1: 24°C / 40°C<br>load for a working life 50 years<br>T2: 50°C / 80°C | $\psi^{0_{sus}}$ | [-]                  | 0,75<br><br>0,73 |                    |                    |     |     |     |     |
| Dustless drilling   |                  |                      |                  |                    |                    |     |     |     |     |
| Sizes   |                  |                      | Ø8               | Ø10                | Ø12                | Ø16 | Ø20 | Ø25 | Ø32 |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b>    |                  |                      |                  |                    |                    |     |     |     |     |
| <b>Dry and wet concrete</b>   | $\tau_{RK,ucr}$  | [N/mm <sup>2</sup> ] | 12,0             | 10,0               | 10,0               | 9,0 | 9,0 | 9,0 | 5,5 |
| Installation safety factor  | $\gamma_{inst}$  | [-]                  | 1,2              |                    |                    |     |     |     |     |
| <b>Flooded hole</b>   | $\tau_{RK,ucr}$  | [N/mm <sup>2</sup> ] | 11,0             | 9,0                | 9,0                | 8,0 | 8,0 | 8,0 | 4,5 |
| Installation safety factor  | $\gamma_{inst}$  | [-]                  | 1,4              |                    |                    |     |     |     |     |
| Factor for Concrete C50/60  | $\psi_c$         | [-]                  | 1                |                    |                    |     |     |     |     |
| Factor for influence of sustained<br>T1: 24°C / 40°C<br>load for a working life 50 years<br>T2: 50°C / 80°C | $\psi^{0_{sus}}$ | [-]                  | 0,75<br><br>0,73 |                    |                    |     |     |     |     |
| Concrete cone failure   |                  |                      |                  |                    |                    |     |     |     |     |
| Factor for concrete cone failure  |                  |                      | $k_{ucr,N}$      | [-]                | 11                 |     |     |     |     |
| Edge distance   |                  |                      | $c_{cr,N}$       | [mm]               | 1,5h <sub>ef</sub> |     |     |     |     |
| Splitting failure   |                  |                      |                  |                    |                    |     |     |     |     |
| Sizes   |                  |                      | Ø8               | Ø10                | Ø12                | Ø16 | Ø20 | Ø25 | Ø32 |
| Edge distance   |                  | $c_{cr,sp}$          | [mm]             | 1,5h <sub>ef</sub> |                    |     |     |     |     |
| Spacing   |                  | $s_{cr,sp}$          | [mm]             | 3,0h <sub>ef</sub> |                    |     |     |     |     |

**Table C5:**

Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

| Combined pullout and concrete cone failure in concrete C20/25  |                            |                      |      |      |                    |     |                      |     |     |     |  |
|--|----------------------------|----------------------|------|------|--------------------|-----|----------------------|-----|-----|-----|--|
| Hammer Drilling  |                            |                      |      |      |                    |     |                      |     |     |     |  |
| Sizes  |                            |                      | M8   | M10  | M12                | M16 | M20                  | M24 | M27 | M30 |  |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b> |                            |                      |      |      |                    |     |                      |     |     |     |  |
| <b>Dry and wet concrete</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 11,0 | 10,0 | 9,5                | 9,0 | 8,5                  | 8,0 | 6,5 | 5,5 |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,0  |      |                    |     |                      |     |     |     |  |
| <b>Flooded hole</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 9,0  | 8,0  | 7,5                | 7,0 | 7,0                  | 6,0 | 5,0 | 4,5 |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |      |                    |     |                      |     |     |     |  |
| Sizes  |                            |                      | M10  | M12  | M16                | M20 | M24                  |     |     |     |  |
| <b>Characteristic bond resistance in cracked concrete for a working life of 50 years</b>                 |                            |                      |      |      |                    |     |                      |     |     |     |  |
| <b>Dry and wet concrete</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 5,5  | 5,5  | 5,5                | 5,0 | 5,0                  |     |     |     |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,2  |      |                    |     |                      |     |     |     |  |
| <b>Flooded hole</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 5,5  | 5,5  | 5,5                | 5,0 | 5,0                  |     |     |     |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |      |                    |     |                      |     |     |     |  |
| Sizes  |                            |                      | M10  | M12  | M16                | M20 | M24                  |     |     |     |  |
| <b>Characteristic bond resistance in cracked concrete for a working life of 100 years</b>                |                            |                      |      |      |                    |     |                      |     |     |     |  |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 4,0  | 4,0  | 4,0                | 3,5 | 3,5                  |     |     |     |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,2  |      |                    |     |                      |     |     |     |  |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 4,0  | 4,0  | 4,0                | 3,5 | 3,5                  |     |     |     |  |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |      |                    |     |                      |     |     |     |  |
| Factor for cracked and uncracked concrete  | C30/37<br>C40/50<br>C50/60 | $\psi_c$             | [-]  |      |                    |     | 1,04<br>1,07<br>1,09 |     |     |     |  |
| Factor for influence of sustained load for a working life 50 years                                       |                            | $\psi^{0_{sus}}$     | [-]  |      |                    |     | 0,77                 |     |     |     |  |
| Concrete cone failure  |                            |                      |      |      |                    |     |                      |     |     |     |  |
| Factor for concrete cone failure for uncracked concrete  |                            | $k_{ucr,N}$          | [-]  |      | 11                 |     |                      |     |     |     |  |
| Factor for concrete cone failure for cracked concrete  |                            | $k_{cr,N}$           | [-]  |      | 7,7                |     |                      |     |     |     |  |
| Edge distance  |                            | $c_{cr,N}$           | [mm] |      | 1,5h <sub>ef</sub> |     |                      |     |     |     |  |



| Splitting failure |             |      |                    |     |     |     |     |     |     |     |  |
|-------------------|-------------|------|--------------------|-----|-----|-----|-----|-----|-----|-----|--|
| Sizes             |             |      | M8                 | M10 | M12 | M16 | M20 | M24 | M27 | M30 |  |
| Edge distance     | $C_{cr,sp}$ | [mm] | 1,5h <sub>ef</sub> |     |     |     |     |     |     |     |  |
| Spacing           | $S_{cr,sp}$ | [mm] | 3,0h <sub>ef</sub> |     |     |     |     |     |     |     |  |

**Table C6:**

**Design method EN 1992-4**

**Characteristic values of resistance to tension load of rebar**

| Combined pullout and concrete cone failure in uncracked concrete C20/25                                  |                            |                      |      |     |     |     |                      |     |     |
|--|----------------------------|----------------------|------|-----|-----|-----|----------------------|-----|-----|
| Diamond core drilling  |                            |                      |      |     |     |     |                      |     |     |
| Sizes  |                            |                      | Ø8   | Ø10 | Ø12 | Ø16 | Ø20                  | Ø25 | Ø32 |
| <b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b> |                            |                      |      |     |     |     |                      |     |     |
| <b>Dry and wet concrete</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 10,0 | 9,5 | 9,0 | 8,5 | 8,0                  | 6,5 | 4,0 |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,2  |     |     |     |                      |     |     |
| <b>Flooded hole</b>  | $\tau_{RK,ucr}$            | [N/mm <sup>2</sup> ] | 10,0 | 9,5 | 9,0 | 8,5 | 8,0                  | 6,0 | 3,5 |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |     |     |     |                      |     |     |
| Sizes  |                            |                      | Ø10  | Ø12 | Ø16 | Ø20 | Ø25                  |     |     |
| <b>Characteristic bond resistance in cracked concrete for a working life of 50 years</b>                 |                            |                      |      |     |     |     |                      |     |     |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 5,0  | 5,0 | 5,0 | 4,5 | 4,5                  |     |     |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,2  |     |     |     |                      |     |     |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 5,0  | 5,0 | 5,0 | 4,5 | 4,5                  |     |     |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |     |     |     |                      |     |     |
| <b>Characteristic bond resistance in cracked concrete for a working life of 100 years</b>                |                            |                      |      |     |     |     |                      |     |     |
| <b>Dry and wet concrete</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 3,5  | 3,5 | 3,5 | 3,5 | 3,5                  | 3,5 |     |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,2  |     |     |     |                      |     |     |
| <b>Flooded hole</b>  | $\tau_{RK,cr}$             | [N/mm <sup>2</sup> ] | 3,5  | 3,5 | 3,5 | 3,5 | 3,5                  | 3,5 |     |
| Installation safety factor   | $\gamma_{inst}$            | [-]                  | 1,4  |     |     |     |                      |     |     |
| Factor for cracked and uncracked concrete  | C30/37<br>C40/50<br>C50/60 | $\psi_c$             |      |     |     |     | 1,04<br>1,07<br>1,09 |     |     |
| Factor for influence of sustained load for a working life 50 years                                       |                            | $\psi^{0_{sus}}$     | [-]  |     |     |     | 0,77                 |     |     |

| Concrete cone failure                                   |             |      |             |
|---|-------------|------|-------------|
| Factor for concrete cone failure for uncracked concrete | $k_{ucr,N}$ | [-]  | 11          |
| Factor for concrete cone failure for cracked concrete   | $k_{cr,N}$  | [-]  | 7,7         |
| Edge distance   | $c_{cr,N}$  | [mm] | $1,5h_{ef}$ |

| Splitting failure |             |      |             |     |     |     |     |     |     |
|-------------------|-------------|------|-------------|-----|-----|-----|-----|-----|-----|
| Sizes             |             |      | Ø8          | Ø10 | Ø12 | Ø16 | Ø20 | Ø25 | Ø32 |
| Edge distance     | $c_{cr,sp}$ | [mm] | $1,5h_{ef}$ |     |     |     |     |     |     |
| Spacing           | $s_{cr,sp}$ | [mm] | $3,0h_{ef}$ |     |     |     |     |     |     |

**Table C7**
**Design method EN 1992-4**
**Characteristic values of resistance to shear load of threaded rod**

| Steel failure without lever arm  |               |      |      |     |     |     |     |     |     |     |
|--|---------------|------|------|-----|-----|-----|-----|-----|-----|-----|
| Sizes  |               |      | M8   | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
| CAS 4.6  | $V_{Rk,s}$    | [kN] | 7    | 12  | 17  | 31  | 49  | 71  | 92  | 112 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,67 |     |     |     |     |     |     |     |
| CAS 5.8  | $V_{Rk,s}$    | [kN] | 9    | 15  | 21  | 39  | 61  | 88  | 115 | 140 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |     |     |     |
| CAS 8.8  | $V_{Rk,s}$    | [kN] | 15   | 23  | 34  | 63  | 98  | 141 | 184 | 224 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |     |     |     |
| CAS 10.9   | $V_{Rk,s}$    | [kN] | 18   | 29  | 42  | 79  | 123 | 177 | 230 | 281 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,5  |     |     |     |     |     |     |     |
| CAS A2-70, CAS A4-70   | $V_{Rk,s}$    | [kN] | 13   | 20  | 30  | 55  | 86  | 124 | 161 | 196 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |     |     |     |     |     |
| CAS A4-80  | $N_{Rk,s}$    | [kN] | 15   | 23  | 34  | 63  | 98  | 141 | 184 | 224 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,33 |     |     |     |     |     |     |     |
| CAS HCR  | $V_{Rk,s}$    | [kN] | 13   | 20  | 30  | 55  | 86  | 124 | 161 | 196 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |     |     |     |
| CAS UHCR   | $V_{Rk,s}$    | [kN] | 13   | 20  | 30  | 55  | 86  | 124 | 161 | 196 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |     |     |     |     |     |
| Characteristic resistance of group of fasteners                            |               |      |      |     |     |     |     |     |     |     |
| Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$ |               |      |      |     |     |     |     |     |     |     |

| Steel failure with lever arm |               |      |      |     |     |     |     |      |      |      |
|------------------------------|---------------|------|------|-----|-----|-----|-----|------|------|------|
| Sizes                        |               |      | M8   | M10 | M12 | M16 | M20 | M24  | M27  | M30  |
| CAS 4.6                      | $M_{Rk,s}^0$  | [kN] | 15   | 30  | 52  | 133 | 260 | 449  | 666  | 900  |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,67 |     |     |     |     |      |      |      |
| CAS 5.8                      | $M_{Rk,s}^0$  | [kN] | 19   | 37  | 66  | 166 | 325 | 561  | 832  | 1125 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |      |      |      |
| CAS 8.8                      | $M_{Rk,s}^0$  | [kN] | 30   | 60  | 105 | 266 | 519 | 898  | 1332 | 1799 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |      |      |      |
| CAS 10.9                     | $M_{Rk,s}^0$  | [kN] | 37   | 75  | 131 | 333 | 649 | 1123 | 1664 | 2249 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,50 |     |     |     |     |      |      |      |
| CAS A2-70, CAS A4-70         | $M_{Rk,s}^0$  | [kN] | 26   | 52  | 92  | 233 | 454 | 786  | 1165 | 1574 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |     |     |      |      |      |
| CAS A4-80                    | $M_{Rk,s}^0$  | [kN] | 30   | 60  | 105 | 266 | 519 | 898  | 1332 | 1799 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,33 |     |     |     |     |      |      |      |
| CAS HCR                      | $M_{Rk,s}^0$  | [kN] | 26   | 52  | 92  | 233 | 454 | 786  | 1165 | 1574 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |     |     |      |      |      |
| CAS UHCR                     | $M_{Rk,s}^0$  | [kN] | 26   | 52  | 92  | 233 | 454 | 786  | 1165 | 1574 |
| Partial safety factor        | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |     |     |      |      |      |

|  |       |     |   |  |  |  |  |  |  |  |
|--|-------|-----|---|--|--|--|--|--|--|--|
| Concrete pry out failure                 |       |     |   |  |  |  |  |  |  |  |
| Factor for resistance to pry-out failure | $k_8$ | [-] | 2 |  |  |  |  |  |  |  |

| Concrete cone failure        |           |      |                                |     |     |     |     |     |     |     |
|------------------------------|-----------|------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|
| Sizes                        |           |      | M8                             | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
| Outside diameter of fastener | $d_{nom}$ | {mm} | 8                              | 10  | 12  | 16  | 20  | 24  | 27  | 30  |
| Effective length of fastener | $l_f$     | {mm} | min ( $h_{ef}$ , 8 $d_{nom}$ ) |     |     |     |     |     |     |     |

**Table C8**
**Design method EN 1992-4**
**Characteristic values of resistance to shear load of rebar**

| Steel failure without lever arm  |               |      |                             |     |     |     |     |      |      |
|--|---------------|------|-----------------------------|-----|-----|-----|-----|------|------|
| Sizes  |               |      | Ø8                          | Ø10 | Ø12 | Ø16 | Ø20 | Ø25  | Ø32  |
| Rebar BSt 500 S  | $V_{Rk,s}$    | [kN] | 14                          | 22  | 31  | 55  | 86  | 135  | 221  |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,5                         |     |     |     |     |      |      |
| Characteristic resistance of group of fasteners                            |               |      |                             |     |     |     |     |      |      |
| Ductility factor $k_r = 1,0$ for steel with rupture elongation $A_s > 8\%$ |               |      |                             |     |     |     |     |      |      |
| Steel failure without lever arm  |               |      |                             |     |     |     |     |      |      |
| Sizes  |               |      | Ø8                          | Ø10 | Ø12 | Ø16 | Ø20 | Ø25  | Ø32  |
| Rebar BSt 500 S  | $M^o_{Rk,s}$  | [kN] | 33                          | 65  | 112 | 265 | 518 | 1013 | 2122 |
| Partial safety factor  | $\gamma_{Ms}$ | [-]  | 1,5                         |     |     |     |     |      |      |
| Concrete pry out failure   |               |      |                             |     |     |     |     |      |      |
| Factor for resistance to pry-out failure                                   | $k_g$         | [-]  | 2                           |     |     |     |     |      |      |
| Concrete cone failure  |               |      |                             |     |     |     |     |      |      |
| Sizes  |               |      | Ø8                          | Ø10 | Ø12 | Ø16 | Ø20 | Ø25  | Ø32  |
| Outside diameter of fastener   | $d_{nom}$     | {mm} | 8                           | 10  | 12  | 16  | 20  | 25   | 32   |
| Effective length of fastener   | $l_f$         | {mm} | min ( $h_{ef}, 8 d_{nom}$ ) |     |     |     |     |      |      |

**Table C9**

**Displacement of threaded rod under tension and shear load Hammer drilling, dustless drilling**

| Sizes                     |         | M8   | M10  | M12  | M16  | M20  | M24  | M27  | M30  |
|---------------------------|---------|------|------|------|------|------|------|------|------|
| <b>Tension load</b>       |         |      |      |      |      |      |      |      |      |
| <b>Uncracked concrete</b> |         |      |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] | 0,05 | 0,04 | 0,03 | 0,02 | 0,02 | 0,02 | 0,01 | 0,01 |
| $\delta_{N\infty}$        | [mm/kN] | 0,11 | 0,09 | 0,06 | 0,04 | 0,03 | 0,02 | 0,02 | 0,02 |
| <b>Cracked concrete</b>   |         |      |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] |      | 0,08 | 0,09 | 0,05 | 0,03 | 0,02 |      |      |
| $\delta_{N\infty}$        | [mm/kN] |      | 0,51 | 0,32 | 0,18 | 0,13 | 0,11 |      |      |
| <b>Shear load</b>         |         |      |      |      |      |      |      |      |      |
| $\delta_{v0}$             | [mm/kN] | 0,48 | 0,30 | 0,20 | 0,11 | 0,10 | 0,08 | 0,06 | 0,05 |
| $\delta_{v\infty}$        | [mm/kN] | 0,72 | 0,45 | 0,30 | 0,17 | 0,14 | 0,12 | 0,10 | 0,08 |

**Table C10**

**Displacement of threaded rod under tension and shear load Diamond core drilling**

| Sizes                     |         | M8   | M10  | M12  | M16  | M20  | M24  | M27  | M30  |
|---------------------------|---------|------|------|------|------|------|------|------|------|
| <b>Tension load</b>       |         |      |      |      |      |      |      |      |      |
| <b>Uncracked concrete</b> |         |      |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] | 0,02 | 0,02 | 0,03 | 0,02 | 0,01 | 0,01 | 0,02 | 0,02 |
| $\delta_{N\infty}$        | [mm/kN] | 0,11 | 0,07 | 0,05 | 0,03 | 0,02 | 0,02 | 0,02 | 0,02 |
| <b>Cracked concrete</b>   |         |      |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] |      | 0,07 | 0,05 | 0,05 | 0,03 | 0,03 |      |      |
| $\delta_{N\infty}$        | [mm/kN] |      | 0,37 | 0,23 | 0,16 | 0,10 | 0,07 |      |      |
| <b>Shear load</b>         |         |      |      |      |      |      |      |      |      |
| $\delta_{v0}$             | [mm/kN] | 0,48 | 0,30 | 0,20 | 0,11 | 0,10 | 0,08 | 0,06 | 0,05 |
| $\delta_{v\infty}$        | [mm/kN] | 0,72 | 0,45 | 0,30 | 0,17 | 0,14 | 0,12 | 0,10 | 0,08 |

**Table C11**

**Displacement of threaded rod under tension and shear load Hammer drilling, dustless drilling**

| Sizes                     |         | Ø8   | Ø10  | Ø12  | Ø16  | Ø20  | Ø25  | Ø32  |
|---------------------------|---------|------|------|------|------|------|------|------|
| <b>Tension load</b>       |         |      |      |      |      |      |      |      |
| <b>Uncracked concrete</b> |         |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] | 0,04 | 0,03 | 0,02 | 0,02 | 0,01 | 0,01 | 0,01 |
| $\delta_{N\infty}$        | [mm/kN] | 0,09 | 0,07 | 0,05 | 0,03 | 0,02 | 0,01 | 0,01 |
| <b>Shear load</b>         |         |      |      |      |      |      |      |      |
| $\delta_{v0}$             | [mm/kN] | 0,05 | 0,04 | 0,03 | 0,02 | 0,01 | 0,01 | 0,01 |
| $\delta_{v\infty}$        | [mm/kN] | 0,08 | 0,06 | 0,05 | 0,03 | 0,02 | 0,01 | 0,01 |

**Table C12**

**Displacement of threaded rod under tension and shear load Hammer drilling, dustless drilling**

| Sizes                     |         | Ø8   | Ø10  | Ø12  | Ø16  | Ø20  | Ø25  | Ø32  |
|---------------------------|---------|------|------|------|------|------|------|------|
| <b>Tension load</b>       |         |      |      |      |      |      |      |      |
| <b>Uncracked concrete</b> |         |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] | 0,04 | 0,04 | 0,03 | 0,02 | 0,02 | 0,02 | 0,02 |
| $\delta_{N\infty}$        | [mm/kN] | 0,10 | 0,07 | 0,05 | 0,03 | 0,02 | 0,02 | 0,02 |
| <b>Cracked concrete</b>   |         |      |      |      |      |      |      |      |
| $\delta_{N0}$             | [mm/kN] | /    | 0,07 | 0,06 | 0,04 | 0,03 | 0,03 | /    |
| $\delta_{N\infty}$        | [mm/kN] | /    | 0,34 | 0,23 | 0,16 | 0,09 | 0,07 | /    |
| <b>Shear load</b>         |         |      |      |      |      |      |      |      |
| $\delta_{v0}$             | [mm/kN] | 0,05 | 0,04 | 0,03 | 0,02 | 0,01 | 0,01 | 0,01 |
| $\delta_{v\infty}$        | [mm/kN] | 0,08 | 0,06 | 0,05 | 0,03 | 0,02 | 0,01 | 0,01 |

**Table C13**
**Seismic performance category C1 - Hammer drilling, Dustless drilling**

| Sizes  |                 |                      | M10  | M12 | M16 | M20 | M24 |
|--|-----------------|----------------------|------|-----|-----|-----|-----|
| Tension load   |                 |                      |      |     |     |     |     |
| <b>Steel failure</b>   |                 |                      |      |     |     |     |     |
| Characteristic resistance CAS 4.6  | $N_{Rk,s,C1}$   | [kN]                 | 23   | 34  | 63  | 98  | 141 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 2,00 |     |     |     |     |
| Characteristic resistance CAS 5.8  | $N_{Rk,s,C1}$   | [kN]                 | 29   | 42  | 79  | 123 | 177 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |     |     |
| Characteristic resistance CAS 8.8  | $N_{Rk,s,C1}$   | [kN]                 | 46   | 67  | 126 | 196 | 282 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |     |     |
| Characteristic resistance CAS 10.9   | $N_{Rk,s,C1}$   | [kN]                 | 58   | 84  | 157 | 245 | 353 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,33 |     |     |     |     |
| Characteristic resistance CAS A2-70,<br>CAS A4-70                            | $N_{Rk,s,C1}$   | [kN]                 | 41   | 59  | 110 | 172 | 247 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,87 |     |     |     |     |
| Characteristic resistance CAS A4-80  | $N_{Rk,s,C1}$   | [kN]                 | 46   | 67  | 126 | 196 | 282 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,60 |     |     |     |     |
| Characteristic resistance CAS HCR  | $N_{Rk,s,C1}$   | [kN]                 | 41   | 59  | 110 | 172 | 247 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |     |     |
| Characteristic resistance CAS UHCR   | $N_{Rk,s,C1}$   | [kN]                 | 41   | 59  | 110 | 172 | 247 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,87 |     |     |     |     |
| <b>Characteristic resistance to pull-out for a working life of 50 years</b>  |                 |                      |      |     |     |     |     |
| Dry, wet concrete and flooded hole   | $\tau_{Rk,C1}$  | [N/mm <sup>2</sup> ] | 5,5  | 5,5 | 5,5 | 4,2 | 5,0 |
| <b>Characteristic resistance to pull-out for a working life of 100 years</b> |                 |                      |      |     |     |     |     |
| Dry, wet concrete and flooded hole   | $\tau_{Rk,C1}$  | [N/mm <sup>2</sup> ] | 3,8  | 3,8 | 4,0 | 2,6 | 3,8 |
| Installation safety factor-Dry and wet concrete                              | $\gamma_{inst}$ | [-]                  | 1,2  |     |     |     |     |
| Installation safety factor-Flooded hole                                      | $\gamma_{inst}$ | [-]                  | 1,4  |     |     |     |     |

# Technical Datasheet - Indo Construction Fastening Systems

| Sizes   |                      |      | M10  | M12  | M16  | M20  | M24  |
|---|----------------------|------|------|------|------|------|------|
| <b>Shear load</b>   |                      |      |      |      |      |      |      |
| <b>Steel failure without lever arm</b>  |                      |      |      |      |      |      |      |
| Characteristic resistance CAS 4.6   | $V_{Rk,s,C1}$        | [kN] | 7    | 10   | 23   | 30   | 40   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,67 |      |      |      |      |
| Characteristic resistance CAS 5.8   | $V_{Rk,s,C1}$        | [kN] | 9    | 13   | 28   | 38   | 51   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,25 |      |      |      |      |
| Characteristic resistance CAS 8.8   | $V_{Rk,s,C1}$        | [kN] | 14   | 21   | 45   | 61   | 81   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,25 |      |      |      |      |
| Characteristic resistance CAS 10.9  | $V_{Rk,s,C1}$        | [kN] | 18   | 26   | 56   | 76   | 101  |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,50 |      |      |      |      |
| Characteristic resistance CAS A2-70,<br>CAS A4-70   | $V_{Rk,s,C1}$        | [kN] | 12   | 18   | 39   | 53   | 71   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,56 |      |      |      |      |
| Characteristic resistance CAS A4-80   | $V_{Rk,s,C1}$        | [kN] | 14   | 21   | 45   | 61   | 81   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,33 |      |      |      |      |
| Characteristic resistance CAS HCR   | $V_{Rk,s,C1}$        | [kN] | 12   | 18   | 39   | 53   | 71   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,25 |      |      |      |      |
| Characteristic resistance CAS UHCR  | $V_{Rk,s,C1}$        | [kN] | 12   | 18   | 39   | 53   | 71   |
| Partial safety factor   | $\gamma_{Ms}$        | [-]  | 1,56 |      |      |      |      |
| Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C7 shall be multiplied by following reduction factor for <b>hot dip galvanized</b> commercial standard rods |                      |      |      |      |      |      |      |
| Reduction factor for hot-dip galvanized rods  | $\alpha_{v,h-dg,c1}$ | [-]  | 0,57 | 0,56 | 0,49 | 0,56 | 0,61 |
| Factor for annular gap  | $\alpha_{gap}$       | [-]  | 0,5  |      |      |      |      |

The anchor shall be used with minimum rupture elongation after fracture  $A_5 \geq 9\%$ ..

Note: Rebars are not qualified for seismic design



**Table C14**
**Seismic performance category C2 - Hammer drilling, Dustless drilling**

| Sizes  |                 |                      | M12  | M16 | M20 |
|--|-----------------|----------------------|------|-----|-----|
| <b>Tension load</b>  |                 |                      |      |     |     |
| <b>Steel failure</b>   |                 |                      |      |     |     |
| Characteristic resistance CAS 4.6  | $N_{Rk,s,C2}$   | [kN]                 | 34   | 63  | 98  |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 2,00 |     |     |
| Characteristic resistance CAS 5.8  | $N_{Rk,s,C2}$   | [kN]                 | 42   | 79  | 123 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |
| Characteristic resistance CAS 8.8  | $N_{Rk,s,C2}$   | [kN]                 | 67   | 126 | 196 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |
| Characteristic resistance CAS 10.9   | $N_{Rk,s,C2}$   | [kN]                 | 84   | 157 | 245 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,33 |     |     |
| Characteristic resistance CAS A2-70, CAS A4-70                               | $N_{Rk,s,C2}$   | [kN]                 | 59   | 110 | 172 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,87 |     |     |
| Characteristic resistance CAS A4-80  | $N_{Rk,s,C2}$   | [kN]                 | 67   | 126 | 196 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,60 |     |     |
| Characteristic resistance CAS HCR  | $N_{Rk,s,C2}$   | [kN]                 | 59   | 110 | 172 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,50 |     |     |
| Characteristic resistance CAS UHCR   | $N_{Rk,s,C2}$   | [kN]                 | 59   | 110 | 172 |
| Partial safety factor  | $\gamma_{Ms}$   | [-]                  | 1,87 |     |     |
| <b>Characteristic resistance to pull-out for a working life of 50 years</b>  |                 |                      |      |     |     |
| Dry, wet concrete and flooded hole   | $\tau_{Rk,C2}$  | [N/mm <sup>2</sup> ] | 1,2  | 1,4 | 1,6 |
| <b>Characteristic resistance to pull-out for a working life of 100 years</b> |                 |                      |      |     |     |
| Dry, wet concrete and flooded hole   | $\tau_{Rk,C2}$  | [N/mm <sup>2</sup> ] | 0,8  | 1,0 | 1,0 |
| Installation safety factor-Dry and wet concrete                              | $\gamma_{inst}$ | [-]                  | 1,2  |     |     |
| Installation safety factor-Flooded hole                                      | $\gamma_{inst}$ | [-]                  | 1,4  |     |     |

| Sizes  |               |      | M12  | M16 | M20 |
|--|---------------|------|------|-----|-----|
| <b>Shear load</b>                              |               |      |      |     |     |
| <b>Steel failure without lever arm</b>         |               |      |      |     |     |
| Characteristic resistance CAS 4.6              | $V_{Rk,s,C2}$ | [kN] | 13   | 18  | 28  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,67 |     |     |
| Characteristic resistance CAS 5.8              | $V_{Rk,s,C2}$ | [kN] | 16   | 22  | 35  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |
| Characteristic resistance CAS 8.8              | $V_{Rk,s,C2}$ | [kN] | 25   | 36  | 56  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |
| Characteristic resistance CAS 10.9             | $V_{Rk,s,C2}$ | [kN] | 32   | 45  | 70  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,50 |     |     |
| Characteristic resistance CAS A2-70, CAS A4-70 | $V_{Rk,s,C2}$ | [kN] | 22   | 31  | 49  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |
| Characteristic resistance CAS A4-80            | $V_{Rk,s,C2}$ | [kN] | 25   | 36  | 56  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,33 |     |     |
| Characteristic resistance CAS HCR              | $V_{Rk,s,C2}$ | [kN] | 22   | 31  | 49  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,25 |     |     |
| Characteristic resistance CAS UHCR             | $V_{Rk,s,C2}$ | [kN] | 22   | 31  | 49  |
| Partial safety factor                          | $\gamma_{Ms}$ | [-]  | 1,56 |     |     |

|   |                      |     |      |      |      |
|---|----------------------|-----|------|------|------|
| Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C8 shall be multiplied by following reduction factor for <b>hot dip galvanized</b> commercial standard rods |                      |     |      |      |      |
| Reduction factor for hot-dip galvanized rods  | $\alpha_{v,h-dg,c2}$ | [-] | 0,46 | 0,61 | 0,61 |
| Factor for annular gap  | $\alpha_{gap}$       | [-] | 0,5  |      |      |

**Table C15**
**Displacement under tensile and shear load - seismic category C2**

| Sizes              |      | M12   | M16  | M20   |
|--------------------|------|-------|------|-------|
| $\delta N,eq(DLS)$ | [mm] | 0,57  | 0,35 | 0,85  |
| $\delta N,eq(ULS)$ | [mm] | 7,62  | 6,75 | 7,28  |
| $\delta V,eq(DLS)$ | [mm] | 5,29  | 4,12 | 4,94  |
| $\delta V,eq(ULS)$ | [mm] | 10,20 | 9,05 | 10,99 |

The anchor shall be used with minimum rupture elongation after fracture  $A_5 \geq 9\%$ ..

Note: Rebars are not qualified for seismic design

CHANNEL PARTNER




## INDO SPARK CONSTRUCTION SERVICES

### CORPORATE OFFICE

198, E ward, Tararani Chowk,  
Near Geeta Mandir,  
Kolhapur - 416 003 (Mah.India)  
Toll Free : 1800 123 500 023  
E-mail : mail@indospark.com

### BRANCHES

Pune | Mumbai



FOLLOW US



[www.indospark.com](http://www.indospark.com)